

lines $\{BL_1$ and $BL_2\}$ of equal length and at the same position for the two monopole arms are printed into the antenna substrate. These two biasing lines have a length of $\{22.2+15.6=37.8$ mm}.

As for the other two switches $\{S_{2, Left}, S_{2, Right}\}$, two additional biasing lines are included of length $\{40.7+12.2=52.9$ mm}. Opposite to the first two switches, the job of these two additional biasing lines is to provide the switches $\{S_{2, Left}, S_{2, Right}\}$ with the appropriate current level. The two biasing lines $\{BL_1$ and $BL_2\}$ also provide a DC ground connection to the switches $\{S_{2, Left}, S_{2, Right}\}$. The position of the four biasing lines is optimized to ensure a minimal destructive effect on the antenna radiation characteristics. The width of the four biasing lines is 0.2 mm. A 5.6 nH SMD inductor is included at the end of each biasing line as shown in Fig. 1.

A. Change in the Antenna Operating Frequency:

The comparison between the simulated and measured antenna reflection coefficient is shown in Fig. 2. This plot corresponds to the two cases:

Case 1: $\{S_{1, Left}\}$ OR $\{S_{1, Right}\}$ are ON (red dotted curve)

Case 2: $\{S_{1, Left}, S_{2, Left}\}$ OR $\{S_{1, Right}, S_{2, Right}\}$ are ON (blue solid curve)

For case 1 the antenna covers the band 3.19-3.29 GHz while for case 2 the band 2.95-3 GHz is covered. The change in the operating frequency of the antenna is due to the increase in the length of the arms of the monopole when activating the switches $S_{2, Left}$ or $S_{2, Right}$.

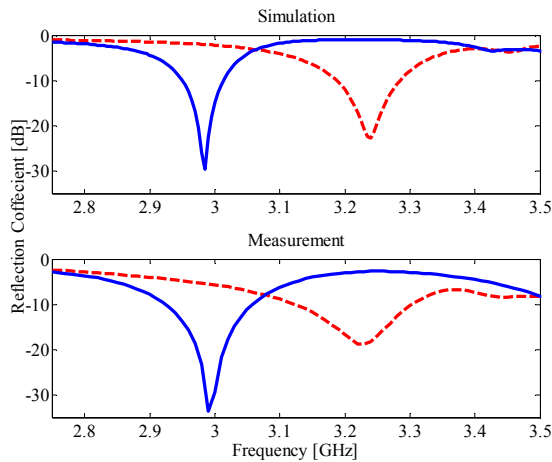


Figure 2. The comparison between the simulated and the measured antenna reflection coefficient when “ $\{S_{1, Left}\}$ OR $\{S_{2, Left}\}$ are ON (red dotted curve)” and when “ $\{S_{1, Left}, S_{2, Left}\}$ OR $\{S_{1, Right}, S_{2, Right}\}$ are ON (blue solid curve)”

B. Change in the Antenna Radiation Pattern:

The proposed antenna structure is also able to change its radiation pattern based on the status of the integrated four PIN diode switches. Therefore, we can consider the following three cases:

Case 1: When $S_{1, Left}$ is ON, the antenna radiated beam will be directed to the left side. The simulated 3D antenna radiation

pattern at $f=3.25$ GHz is shown in Fig. 3(a). From this plot, we can inspect that the maximum radiation occurs to the left side and at a tilted angle by following the tilt angle of the arm of the left monopole antenna.

Case 2: When $S_{1, Right}$ is ON, the 3D antenna pattern at $f=3.25$ GHz is shown in Fig. 3(b). The same pattern is obtained as for Case 1, but now the maximum beam is directed to the right side of the antenna.

Case 3: When both switches $\{S_{1, Left}, S_{1, Right}\}$ are ON, the radiation pattern is the summation of the pattern radiated by the left and the right monopole arms. Therefore, the corresponding radiation pattern shown in Fig. 3(c) corresponds to this case for $f=3.25$ GHz.

It is important to note that an identical pattern is obtained when the length of each arm of the monopole is increased by activating the second pair of switches.

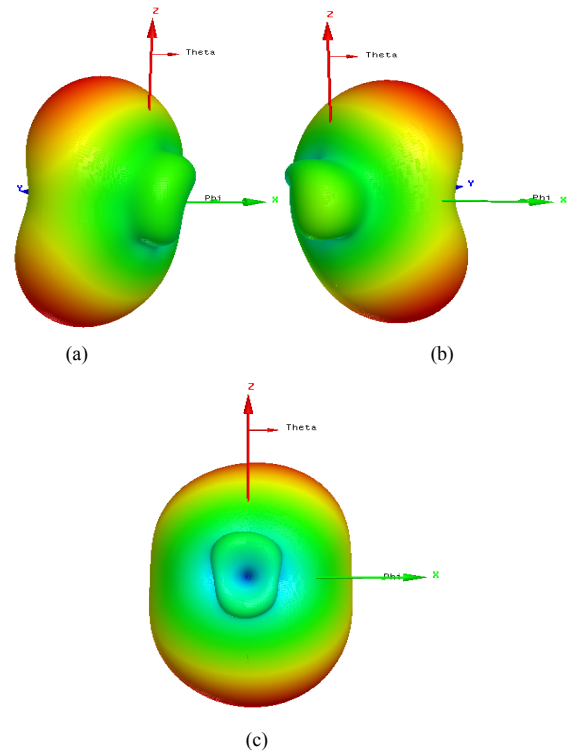


Figure 3. The 3D antenna radiation pattern at $f=3.25$ GHz when (a) $S_{1, Left}$ is ON (b) $S_{1, Right}$ is ON (c) both are ON

REFERENCES

- [1] S. Yang, C. Zhang, H. Pan, A. Fathy, and V. Nair, “Frequency reconfigurable antennas for multiradio wireless platforms,” *IEEE Microwave Magazine*, vol. 10, no. 1, pp. 66–83, Feb. 2009
- [2] C. G. Christodoulou, Y. Tawk, S. A. Lane, and S. R. Erwin, “Reconfigurable antennas for wireless and space applications,” *Proceedings of the IEEE*, vol. 100, no. 7, pp. 2250–2261, Jul. 2012
- [3] Infineon Technologies, <http://www.infineon.com>